

FERABOLI 265 LT LTC

圓型牧草打包機



 VARIABLE CHAMBER ROUND BALER

EXTREME LT - LTC

THE VARIABLE CHAMBER TO THE EXTREME!





FERABOLI ROUND BALERS

Feraboli round balers are designed for the maximum flexibility and reliability in any condition. Delicate with premium hay and perfect with moist fodder, also ideal with difficult products such as cornstalks and straw. Long life, high work capacity, perfectly shaped bales, compact and heavyweight: all these features make Feraboli round balers a profitable investment.

EXTREME LT - LTC

EXTREME VARIABLE CHAMBER ROUND BALER

THE SOLUTION FOR AGRICULTURAL CONTRACTORS AND LARGE FARMS

This round baler can obtain multiple results with different types of products. Its great versatility allows it to make bales with different diameter, density and weight.



GREENERY



STRAW



MAIZE



HAY



WIRE
BINDING



NET BINDING



PACKER



ROTOR



FEED SYSTEM

ALTERNATIVE PACKER



Ideal for short and dry mulched straw cut up or to harvest delicate short and brittle fodder without damaging it.

13 BLADE CUT



Cut rotary feeder. The rotor with blades set in a double spiral distributes the product evenly in the chamber. The blades cut the fodder at a length equal to 77 mm.

BELT VARIABLE CHAMBER

SET THE SIZE YOU WANT

You can set the desired bale diameter from the control unit in the cab (between 50 and 165 cm).



BINDING



WIRE BINDING



NET BINDING



EXTREME LT - LTC

PROMPT RESTART

After the fast binding of the bale (approximately 5 sec.) work can be resumed quickly. The **LT** model features an alternative feeder which takes the fodder after the pick-up and introduces it directly into the compression chamber, making a more compact bale.





EASYTRONIC

Simple easy to use control unit to change bale diameter, baling density, binding system, all visible on a large graphic display.



EXTREME LT - LTC

OUR HEART

Being capable of managing the bale forming process means to be able to control the density of the bale based on the moisture of the product, with binding guaranteeing the maximum quality of the final product, optimising production costs.



MAXIMUM SPEED FROM THE START

When the bale starts to be formed, the operator can go at maximum speed as the five belts easily harvest the product from the start of work. This helps forming the bale and guarantees a core structured as you wish, which is very important for the finished product.



EXTREME LT - LTC

BINDING SYSTEMS



NET BINDER



2ND NET ROLL HOUSING
(ADDITIONAL ROLL)



NET ROLL



ACCESSORIES



3 TYPES OF TYRES



SHRINKING CUPS



BRAKE KIT




FRONT ROLLER



HILL KIT



DUMMY BLADES KIT

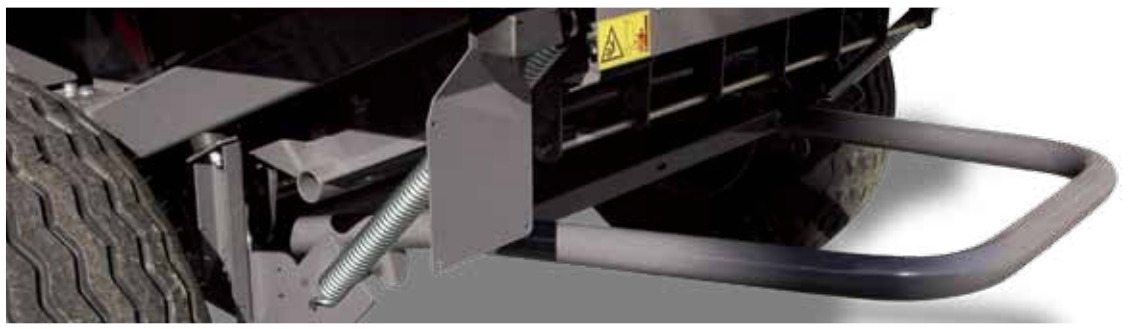

EJECTOR

SPARE PARTS



QUICK INTERVENTION KIT



PICK-UP SPRINGS



CHAMBER	LT	LTC
Diameter (from 500 mm)		to 1650 mm
Width		1200 mm
MACHINE DIMENSIONS		
Length		4180 mm
Width		2520 mm
Height		2600 mm
Weight	2550 kg	3050 kg
TRACTOR		
PTO	540 min ⁻¹ - 60 hp	540 min ⁻¹ - 80 hp
Hydraulic system	1 double acting socket, 1 single acting socket.	
Electric installation	1 socket 12V	
PICK-UP		
Total harvesting width	2000 mm (2200 mm OPTIONAL)	
Tooth pitch	69 mm	
SYSTEMS		
Hydraulic	1 single acting - 1 double acting	
Electric	1 electric socket 12 V	
PACKER		
Type	Alternative packer	13 blade rotor
PRESSING		
Type	Hydraulic	
N° belts	5 width 218 mm	
Density adjustment	Electronic	
BINDERS		
Wire	With settings from the cab	
Net	With settings from the cab	
CONTROLS		
Binders	Electric	
Door	Hydraulic	
Pick-up	Hydraulic	
TYRES		
Size	400 / 60 - 15.5	



A Division of Ken-Ding Group

瑋洲企業有限公司

地址：台灣高雄市前鎮區武德街 135 巷 24 號

信件請寄：高雄市郵政信箱 1394 號

Tel : 07-7169249 Fax : 07-2134620

Weizhou International Co., Ltd


Address : No. 24, Lane 135 Wu-de St., Kaohsiung City, Taiwan ROC80647


Mailing : P. O. Box 1394 kaohsiung City, Taiwan ROC

Tel : 886-7-7169249 Fax : 886-7-2134620

E-MAIL : agri-machine@weizhou.com.tw


<http://www.weizhou.com.tw/Agrimachine/i-roundbaler/index.htm>


 QQ : 1467808036

 SKYPE : service450429

 LINE : weizhou1995

 Wechat : walterhsu1995

 Viber : +886972326392

 WhatsApp : +886972326392