PA3430 | PA4330

3.4m (11’ 2”) reach | **4.3m (14’ 1”) reach**

KENDING

瑋洲企業有限公司
地址: 台灣高雄市前鎮區武德街135巷24號
信件請寄 : 高雄市郵政信箱1394號
Tel：07-7169249 Fax：07-2134620
agri-machine@weizhou.com.tw
http://www.weizhou.com.tw/Agrimachine/Index-import.htm

Machine Features

- 3.4m and 4.3m reach
- Left hand or right hand build option
- Low power requirement
- Three-point linkage-mounting system
- Parallel arm geometry
- Hydraulic safety breakaway
- High-performance hydraulic system
- Storage support legs
- Operator-friendly
- Choice of control systems
- Choice of attachments
- Front-mounted build option

Markets

- Horticultural / Landscape
- Groundcare / Amenity
- Governmental
- Contractors

Tractor Requirements

- 1300kg minimum tractor weight
- 35hp minimum tractor horsepower

Tractor Requirements	PA3430	PA4330
Min Horsepower Requirements	35hp	45hp
Machine Specification		
Maximum Reach	3.4m (11'2")	4.3m (14'1")
Machine Weight*	400kg	523kg
Hydraulics		
Gear Semi Independent		☐
Method of Attachment		
3-Point Linkage-Mounted		■
Controls		
Cable Control		☐
Switchbox		☐
Monolever		☐
Machine Equipment		
Parallel Arm Geometry		■
Midcut Pack or VFR		—
Lift Float Kit		☐
Oil Cooler		—
Safety Breakaway - *Hydraulic*		■
Road Lighting Kit		—
Warning Arrow - *Magnetic*		—
Cushioned Top Link		—
Front Mounting Build		☐
Front Flap Kit		■
Hydraulic Roller		—
Power Arm Attachments		
1.20m Swingtrim Cutter Bar		—
1.50m Swingtrim Cutter Bar		—
1.50m Sheartrim Cutter Bar - *SD*		☐
1.60m Sheartrim Cutter Bar - *MD*		—
2.00m Sheartrim Cutter Bar - *MD*		—
1.40m Sheartrim Cutter Bar - *HD*		—
2.20m Sheartrim Cutter Bar - *HD*		—
1.00m Compact Supercut Flailhead - *GDD*		☐
1.20m Compact Supercut Flailhead - *DD*		☐
1.20m Multicut Flailhead - *DD or BD*		—
1.20m Omega Flailhead - *DD or BD*		—
1.50m Multicut Flailhead - *DD or BD*		—

	PA3430	PA4330
Minimum Tractor Weight	1300kg	2000kg
Power Arm Horsepower	30hp	30hp
Oil tank Capacity	80ltr	80ltr
Gear Totally Independent		☐
5-Point Axle Bracket-Mounted		—
Xtra Touch Control - Mini (XTC - Mini)		☐
Xtra Touch Control		—
REVOLUTION Control + EDS (Optional)		—
Telescopic Dipper Arm		—
Angle Float Kit - *Standard On Electric Models*		☐
Easy Drive System (EDS)		—
Power Slew		—
Cable Rotor Control - *Dual Rotation (Ti only)*		■
Electric Rotor Control - *Dual Rotation (Ti only)*		☐
Window Guards		■
Debris Blower		—
Orbitor Head Kit		—
Flailhead Skid Kit		☐
Flailhead Cushioned Grass Mowing Roller		—
1.50m Omega Flailhead - *DD or BD*		—
1.60m Multicut Flailhead - *DD or BD*		—
1.60m Omega Flailhead - *DD or BD*		—
2.00m Multicut Flailhead - *DD or BD*		—
1.20m Rotary Head - FC - 2 *Rotor*		☐
1.20m Rotary Head - MD - 1 *Rotor*		—
1.50m Rotary Head - HD - 1 *Rotor*		—
1.40m Multisaw 1400		☐
1.60m Multisaw 1600		☐
2.00m Multisaw 2000		—
2.40m Multisaw 2400		—
0.70m Ditch and Grip Cleaner		—

Standard Equipment ■ Optional Equipment ☐ Not Available —

** depending on machine specification excluding attachment and oil*

Control Options

The boxes that are ticked indicate the control options available for this Power Arm

» Choice of Controls

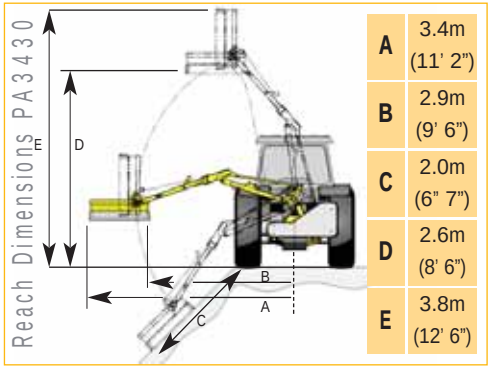

A	3.4m (11' 2")
B	2.9m (9' 6")
C	2.0m (6" 7")
D	2.6m (8' 6")
E	3.8m (12' 6")

» For illustration purposes only

» PA4330 Front Mount

» Hedge Cutting

» Front-Mounted

POWER ARM 3430 & 4330

PA3530 Skid Steer / Utility Loader Series

3.7m (12’ 2”) reach

Machine Features

- 3.7m reach
- Left hand or right hand build option
- Low power requirement
- Front-mounted
- Three-point linkage-mounting system
- Parallel arm geometry
- Hydraulic safety breakaway
- High-performance hydraulic system
- Folding flat arms for transport
- Storage support legs
- Operator-friendly
- Choice of control systems
- Choice of attachments

Markets

- Horticultural / Landscape
- Groundcare / Amenity
- Governmental
- Contractors

Tractor Requirements

- 1300kg minimum tractor weight
- 35hp minimum tractor horsepower

Tractor Requirements			
Minimum Horsepower Requirements	35hp	Minimum Tractor Weight	1300kg
Machine Specification			
Maximum Reach	3.7m (12'2")	Power Arm Horsepower	30hp
Machine Weight*	400kg	Oil tank Capacity	55 ltr
Hydraulics			
Gear Semi Independent	☐	Gear Totally Independent	☐
Method of Attachment			
3-Point Linkage-Mounted	☐	DIN Plate-Mounted	☐
Controls			
Cable Control	☐	Xtra Touch Control - Mini (XTC - Mini)	☐
Switchbox	☐	Xtra Touch Control	—
Monolever	☐	REVOLUTION Control + EDS (Optional)	—
Machine Equipment			
Parallel Arm Geometry	■	Telescopic Dipper Arm	—
Midcut Pack or VFR	—	Angle Float Kit - *Standard On Electric Models*	☐
Lift Float Kit	☐	Easy Drive System (EDS)	—
Oil Cooler	—	Power Slew	—
Safety Breakaway - *Hydraulic*	■	Cable Rotor Control - *Dual Rotation (Ti only)*	■
Road Lighting Kit	—	Electric Rotor Control - *Dual Rotation (Ti only)*	☐
Warning Arrow - *Magnetic*	☐	Window Guards	■
Cushioned Top Link	—	Debris Blower	—
Front Mounting Build	■	Orbitor Head Kit	—
Front Flap Kit	■	Flailhead Skid Kit	☐
Hydraulic Roller	—	Flailhead Cushioned Grass Mowing Roller	—
Power Arm Attachments			
1.20m Swingtrim Cutter Bar	—	1.50m Omega Flailhead - *DD or BD*	—
1.50m Swingtrim Cutter Bar	—	1.60m Multicut Flailhead - *DD or BD*	—
1.50m Sheartrim Cutter Bar - *SD*	☐	1.60m Omega Flailhead - *DD or BD*	—
1.60m Sheartrim Cutter Bar - *MD*	—	2.00m Multicut Flailhead - *DD or BD*	—
2.00m Sheartrim Cutter Bar - *MD*	—	1.20m Rotary Head - FC - 2 *Rotor*	☐
1.40m Sheartrim Cutter Bar - *HD*	—	1.20m Rotary Head - MD - 1 *Rotor*	—
2.20m Sheartrim Cutter Bar - *HD*	—	1.50m Rotary Head - HD - 1 *Rotor*	—
1.00m Compact Supercut Flailhead - *GDD*	☐	1.40m Multisaw 1400	☐
1.20m Compact Supercut Flailhead - *DD*	☐	1.60m Multisaw 1600	☐
1.20m Multicut Flailhead - *DD or BD*	—	2.00m Multisaw 2000	—
1.20m Omega Flailhead - *DD or BD*	—	2.40m Multisaw 2400	—
1.50m Multicut Flailhead - *DD or BD*	—	0.70m Ditch and Grip Cleaner	—

Standard Equipment ■ Optional Equipment ☐ Not Available —

** depending on machine specification excluding attachment and oil*

Control Options

The boxes that are ticked indicate the control options available for this Power Arm

» Choice of Controls

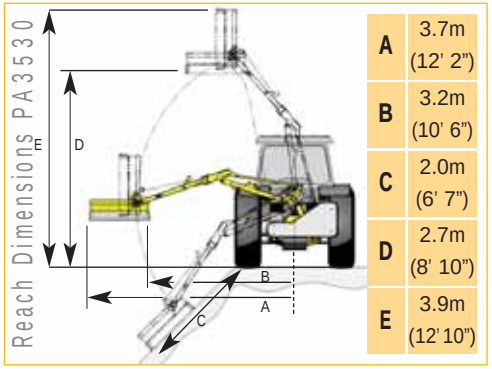

A	3.7m (12' 2")
B	3.2m (10' 6")
C	2.0m (6' 7")
D	2.7m (8' 10")
E	3.9m (12' 10")

» For illustration purposes only

» Verge Cutting

» Utility Vehicle Mounting

» Verge Mowing