





## farm silos

We have a wide variety of silos and all necessary accessories for their installation and perfect functioning. Our silos are differentiated according to their storage capabilities and exits, which can be side or central located. **We take care of all your silo needs.**

Our high quality steel-made farm silos are protected by an innovative coating. **This new Zinc, Aluminum and Magnesium coating is up to 10 times more resistant to environmental corrosion than the traditional galvanization. With this impressive performance we warranty our farm silos for up to 20 years against environmental corrosion \*.**

Our modular design with no welding or paint utilizes steel sheeting with a shallow corrugation in order to manage product stored with a tendency to stick on the inside.

Our farm silos are manufactured with reinforced ribbed roofing and drip edge. **We achieve an elevated level of resistance to deformations and corrosion.**

In addition, we have designed a new silo stairway confirming to the UNE-EN ISO 14122 norms **with Full Compliance status.**

**We have created a product to meet your needs with a total satisfaction quality guarantee.**

\*Warranty applicable in zones C1 Norm ISO 9223

- 5 diameters available: 185cm; 255cm; 280cm; 305cm or 350cm and from 1 to 4 wallrings
- Thickness sheets from 0.8mm to 1.2. or higher
- Mechanical, pneumatic or both combined load type





**SILO 185 60° HOPPER**

mod.	capacity m <sup>3</sup>	capacity tn	Height(m) C/L
185/1	4.60	2.99	3.90/4.77
185/2	7.40	4.81	5.00/5.91
185/3	10.30	6.70	6.20/7.05



**SILO 255 60° HOPPER**

mod.	capacity m <sup>3</sup>	capacity tn	Height(m)
255/1	10.90	6.68	4.81
255/2	16.67	10.43	5.95
255/3	22.44	14.56	7.09
255/4	28.21	18.33	8.24

**SILO 255 60° SIDED HOPPER**

mod.	capacity m <sup>3</sup>	capacity tn	Height(m)
255/1	10.28	6.68	5.12
255/2	16.05	10.43	6.26
255/3	21.82	14.56	7.41
255/4	27.59	17.93	8.55

**SILO 280 60° HOPPER**

mod.	capacity m <sup>3</sup>	capacity tn	Height(m)
280/1	13.86	9.01	5.20
280/2	20.85	13.55	6.35
280/3	27.84	18.10	7.49
280/4	34.83	22.64	8.63

**SILO 280 60° SIDED HOPPER**

mod.	capacity m <sup>3</sup>	capacity tn	Height(m)
280/1	13.17	9.01	5.41
280/2	20.16	13.55	6.55
280/3	27.15	18.10	7.69
280/4	34.14	22.64	8.84

**SILO 305 60° HOPPER**

mod.	capacity m <sup>3</sup>	capacity tn	Height(m)
305/2	25.23	16.40	6.40
305/3	29.30	19.05	7.50
305/4	37.71	24.51	8.60
305/5	45.48	29.56	9.80

**SILO 350 60° HOPPER**

mod.	capacity m <sup>3</sup>	capacity tn	Height(m)
350/2	31.70	20.60	6.40
350/3	42.02	27.31	7.50
350/4	52.26	33.96	8.60
350/5	63.70	41.40	9.80





**feed auger**



Single transfer unit — 2 exits  
3 exits




Silo boot — single  
double



Slide gate assembly



3 phase motor reduction 300 rpm — 1 hp  
1,5 hp  
1 phase motor reduction 300 rpm — 1 hp  
1,5 hp

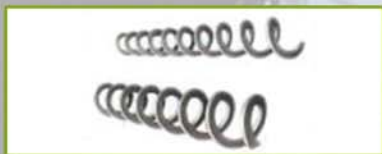

Spiral for pipe



Drop T kit outlet



PVC line pipe



Control unit





**silos accessories**

- Hopper cleaning door
- Hopper viewer
- Back discharge outlet - Diam. 260
- Optional stainless steel hopper
- Slide gate over spiral hopper - Diam. 400
- Load cell weighing system

- Addit. discharge in hopper pipe type 200x200x500
- Optional flat metal sheet
- Increase of legs 1m
- Calf hopper
- Pneumatic fill kit



hopper viewer




optional flat metal sheet



addit. discharge in hopper pipe type



hopper cleaning door

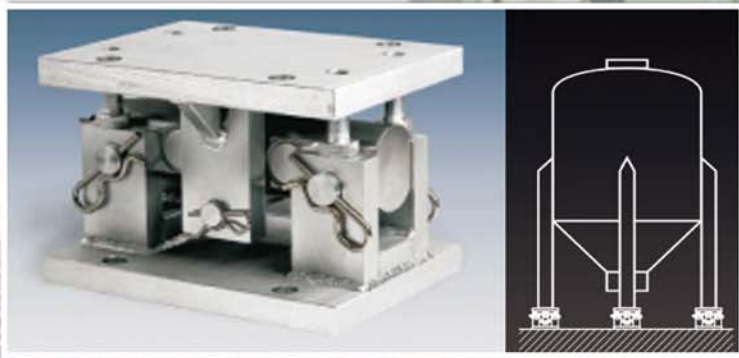

load cell weighing system



pneumatic fill kit

