

Red power on green fields

JF-STOLL

New range of drum mowers:

Compact and reliable mowers

NEW!

Quick replacement of blades!!



Rear mounted drum mower

CM 170 - 1.65 m working width

CM 190 - 1.90 m working width



The hitch pins can be adjusted to any tractor.

Conversion from the tractor cabin - without hydraulics!



Conversion from the tractor cabin

Conversion from working to transport position and vice versa takes place from the comfort of the tractor seat, mechanically and without any hydraulics. The conversion is made quickly and effectively which means that you save time when driving from field to field!



Optimal machine safety!



Adjustable crash protection

CM is fitted with a simple and effective adjustable crash protection system. If the machine hits a protruding stone or other obstacles it moves backwards. This protects the machine as well as the tractor.

Protective shock absorption

The power transmission takes place by means of a spring-loaded V-belt drive. This eliminates vibrations and shocks, whereby the transmission is protected!



Good flow through the machine!

Good flow means perfect swaths

There is a large passage between the drums and the swath curtain is hanging freely behind the mower. This ensures a good flow of the material and thus a well-shaped swath.



Front mounted drum mower

A perfect swath is placed between the tractor wheels!

CM 305 F
3.05 m working width



Easy access for replacement of blades

The front guard can be folded up for easy replacement of blades.

NEW!

Adjustable swath rollers

The swath rollers can be adjusted without tools. The mechanism is spring-loaded which means that foreign matter can pass through the machine without causing any damage.



Strong side guards ensure minimum transport width

The foldable side guards ensure a minimum transport width of 3 m. All guards are fitted with a pipe which works as a handle and protects the machine in case of small collisions.

NEW!




Clean stubble!

Stubble height adjustment

The stubble height can be adjusted in different ways. Placement of spacers on the drum is one possibility.

Furthermore an optional equipment is available which makes it possible to turn the slide disc in relation to the drum. Thereby the stubble height can be adjusted continuously.

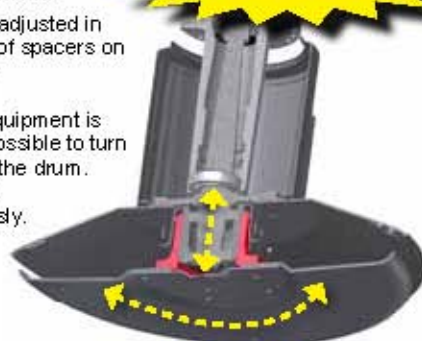

NEW!



Windguard between the drums

CM-F is equipped with a windguard between the middle drums to avoid disturbing airflow. Thereby a clean stubble is obtained.



Simple and effective contour device

The contour device on CM-F allows the mower to "float" in all directions. A gas cylinder is incorporated into the headstock to "dampen" the suspension movement.



Robust and easy to maintain



Quick replacement of blades

Blades are replaced quickly and easily by means of the supplied ergonomic tool. Press down gently – the blade is released and the new blade can be mounted.



Movable blade holders

Drum skirts are equipped with an extra set of holes for the blades. Furthermore, the drum skirt has extra reinforcement at the blade holder. This also doubles the normal life.



Sectioned drum construction

The drums are divided into several sections. This means easy and cost-efficient replacement of parts.



Top Service

No longer do you have to drain the grease filled gear through. The top of the drum can be removed. This facilitates the replacement of spare parts and reduces the number of hours in the workshop.

The drum mowers are equipped with twisted blades which "throw" the crop away from the blade as soon as it has been cut. This ensures a clean stubble.



All gears have double keyways and are therefore firmly fixed to the shafts. No unnecessary operational stoppages.

The drum shafts have no less than 4 strong bearings. They help increasing the machine's life noticeably.



Technical data	CM 170	CM 190	CM 265 F	CM 305 F
Type	Rear mounted	Rear mounted	Front mounted	Front mounted
Working width	1.65 m	1.90 m	2.65 m	3.05 m
Tractor, min.	22 kW/30 HP	30 kW/40 HP	40 kW/54 HP	50 kW/68 HP
Number of drums	2	2	4	4
Number of blades	6	6	12	12
Adjustment of stubble height with spacers	Option	Option	Option	Option
Continuous adjustment of stubble height	-	-	-	Option
Stone release	Standard	Standard	-	-
Contour device	-	-	Standard	Standard
Rotating slide disc	-	-	Standard	Standard
Turnable slide disc	Standard	Standard	Standard	Standard
Weight	365 kg	480 kg	630 kg	705 kg

Dealer

WEIZHOU INTERNATIONAL CO., LTD.

瑋洲企業有限公司

高雄市前鎮區武德街135巷24號

e-mail: agri-machine@weizhou.com.tw

Tel: 07-7169249 Fax: 07-2134620

Some photos may show products with additional equipment. See price list for current standard and additional equipment. We reserve the right to change the construction and specification details without notice. Printer's errors excepted.